

Application of machine learning and rough set theory in lean maintenance decision support system development

Indexed by:



Katarzyna Antosz^{a,*}, Małgorzata Jasiulewicz-Kaczmarek^b, Łukasz Paško^a, Chao Zhang^c, Shaoping Wang^c

^aRzeszow University of Technology, Faculty of Mechanical Engineering and Aeronautics, Powstańców Warszawy 8, 35-959 Rzeszów, Poland

^bPoznan University of Technology, Faculty of Management Engineering, Prof. Rychlewskiego 2, 60-965 Poznan, Poland

^cBeihang University (BUAA), School of Automation Science and Electrical Engineering, 37 Xueyuan Road, Beijing, 100191, China

Highlights


- A review of lean maintenance importance in manufacturing.
- A approach with rough set theory and decision tree.
- Rough set theory with different types of algorithms selected for predictive models.
- The classification model for lean maintenance implementation assessment.

Abstract

Lean maintenance concept is crucial to increase the reliability and availability of maintenance equipment in the manufacturing companies. Due the elimination of losses in maintenance processes this concept reduce the number of unplanned downtime and unexpected failures, simultaneously influence a company's operational and economic performance. Despite the widespread use of lean maintenance, there is no structured approach to support the choice of methods and tools used for the maintenance function improvement. Therefore, in this paper by using machine learning methods and rough set theory a new approach was proposed. This approach supports the decision makers in the selection of methods and tools for the effective implementation of Lean Maintenance.

Keywords

lean maintenance, availability, machine learning, decision trees, rough set theory

This is an open access article under the CC BY license (<https://creativecommons.org/licenses/by/4.0/>) 

1. Introduction

Maintenance processes have a significant impact on manufacturing companies such as: production efficiency, safety and environment requirements and customers satisfaction [19, 23, 28, 38]. In addition, delivering high-quality products with tighter tolerances and lower waste and rework levels also depends on well-maintained equipment, which is another reason to develop more efficient maintenance processes [39]. Moreover, Marksberry [52] determined as the waste of production process the 'maintenance of machines and devices'. Various concepts have been used to decrease reliability and availability of machines and devices, one of them is Lean Maintenance (LMn) [29]. LMn deals with the integration of people in the production process, using certain methods and tools for continuous improvement, as well as the elimination of waste in value-added activities.

The complexity of various LMn tools and methods as well as the investment costs make the LMn implementation a difficult and complex process, although this concept has an impact on the business results of the organization [10]. The problem of inadequate understanding of the relationship between LMn and the operating environment of manufacturing companies causes the LMn implementation to fail [17]. Therefore, an important aspect is the development of systems supporting the assessment of the effectiveness of LMn implementation. [91].

The aim of the article is to develop a decision support system, which will be helpful for decision-makers from companies in select-

ing appropriate LMn methods and tools that have the greatest impact on the company's operational results. In the proposed decision making system the machine learning methods and rough set theory was used. The main research question was: Which of the LMn tools had the greatest impact on reducing the number of unplanned downtime?

The remainder of this paper is structured as follows. In Section 2 the literature review according the importance of maintenance function in manufacturing and lean maintenance is presented. Then, in Section 3 the research methodology is presented. In Section 4 the results of using decision trees and rough set theory to generate categorization models in the assessment of the implementation of lean maintenance are presented. Finally, the conclusions and direction of the future research are presented.

2. Background

2.1. The importance of maintenance function in manufacturing

Modern manufacturing companies focus on the availability, reliability and productivity of their manufacturing machines and devices [39, 84]. Equipment maintenance and system reliability are important factors that have impact on the ability to provide quality and timely products to clients, comply with legal requirements, and meet business goals. These needs have placed the maintenance function in the

(*) Corresponding author.

E-mail addresses: K. Antosz - kcktmip@prz.edu.pl, M. Jasiulewicz-Kaczmarek - malgorzata.jasiulewicz-kaczmarek@put.poznan.pl, Ł. Paško - lpasko@prz.edu.pl, C. Zhang - cz@buaa.edu.cn, S. Wang - shaopingwang@vip.sina.com

spotlight as a strategic function for manufacturing companies [54, 58, 78, 79].

As defined by European standard EN 13306, maintenance is a “the combination of all technical, administration and management actions during the life cycle of an item intended to retain it in, or restore it to, a state in which it can deliver the required function (function or a combination of functions of an item which are considered necessary to provide a given service).” The presented definitions express the multidisciplinary character of maintenance operations, which include both technical aspects of the technical facility performance and all in-service aspects, referring to the facility itself and to all stakeholders and resources engaged into maintenance processes. According to [66] “Maintenance operations are much like manufacturing operations where both employ processes that add value to the basic input used to create the end product”

As maintenance management in a manufacturing company combines various functions (organizational and business) its implementation is complex and requires the utmost attention. According to [89] “maintenance is not just ensuring healthiness of equipment in a facility but it also plays a crucial role in achieving organization’s goals and objectives with optimum maintenance cost and maximum production. [...] and needs to be viewed as a strategic function in an organization”. Defining an appropriate maintenance strategy is seen as a way to turn your company’s goals into maintenance goals [89]. Maintenance objectives at strategic and tactical levels of the organization can be define in five categories [88]. First category is maintenance budget, which consists e.g. maintenance costs and maintenance value. In the second category functional and technical aspects such as: availability, maintainability, reliability, Overall Equipment Effectiveness (OEE), productivity, maintenance and output quality are described. Third category contains plant design life. Next category includes inventory of spare parts and logistics. Finally, people and environment are counted in the last category. To achieve this objectives maintenance strategies have evolved with the course of time, From reactive maintenance (“run-to fail” logic) to proactive maintenance (PrM) strategies such as: Preventive Maintenance (PM) or Predictive Maintenance (PD). The main goal of PrM strategies is to monitor the equipment and making minor repairs to keep them in the good condition with high performance. Research conducted by [32] shows that adopting predictive maintenance in an enterprise can minimize maintenance costs up to 30% and eliminate breakdowns up to 75% compared to preventive maintenance.

Today, maintenance with a strategic role in revenue generation is seen as source of added-value, with key role for driving performance improvement [51]. According to [37] “advanced practice in maintenance can play a role in achieving more competitive, responsible and sustainable performance in manufacturing companies.” In this line maintenance should be view as an important function in achieving sustainability in manufacturing processes. Many researcher start to study the impacts and contributions of maintenance function to more sustainable operations in manufacturing companies. From the economic dimension of sustainable manufacturing four factors quality and productivity, delivery on time, innovation and cost are affected by the maintenance function [40, 49]. From environment dimension of sustainable manufacturing most frequently prevention of environmental damage, emissions reduction and land conservation, energy consumption reduction and energy savings are underlined [60, 72]. Finally, from the social dimension of suitability manufacturing are underlined the relationship of the maintenance function with its stakeholders within and outside the company, with a particular focus on the maintenance personnel, who is affected by decisions made in the maintenance department [22, 41].

Manufacturing industry has now embarked on a digital transformation following the Industry 4.0 paradigm in which the maintenance organization is expected to play a key role in enabling robust autonomous systems [49]. According to [56], many companies consider maintenance processes improvement as the one of the initial stages towards Industry 4.0 concept.

The growing complexity of the production environment, new requirements and new opportunities force the maintenance managers to constantly search for opportunities to improve activities and processes. Dekker [27] stress that “the main question faced by maintenance management, whether maintenance output is produced effectively, in terms of contribution to company profits”. Although this question was asked many years ago, it is still timely and is very difficult to answer. Many researchers and practitioners proposed models to solve maintenance-related problems and pointed out that successful implementation of these models depends on appropriate understanding and using properly tools and techniques indicated in this models.

2.2. Lean and maintenance

Lean Manufacturing (LM) is worldwide recognition methodology for the improvement of internal processes, popularised by the book ‘The Machine that Changed the World’ [15]. The main challenge of LM is to increasing customer satisfaction while decreasing waste and losses. The benefits of lean implementation are divided in two field. Firstly, LM eliminates wastes, decreases delivery, lead and cycle times, decrease inventories, and increase the productivity [11, 45]. Secondly, LM improves the workers satisfaction, good communication, and decision-making process [25].

LM demand for a reliable and stable machine operation gave way to another concept - Lean Maintenance [82] also known as Lean TPM (Total Productive Maintenance) [55]. According to [82] “without a Lean Maintenance operation, Lean Manufacturing can never achieve the best possible attributes of Lean”, so “first – Lean Maintenance, and next – Lean Manufacturing”.

According to [77] “Lean production shifts the attention of maintenance improvement from the technical matters to the management side, which focuses on eliminating the root causes of problems through team-based decisions and implementation”.

Smith and Hawkins [82] defined LMn as “proactive maintenance operation employing planned and scheduled maintenance activities through total productive maintenance (TPM) practices, using maintenance strategies developed through application of reliability centered maintenance (RCM) decision logic and practiced by empowered (self-directed) action teams using the 5S process, weekly Kaizen improvement events, and autonomous maintenance together with multi-skilled, maintenance technician-performed maintenance through the committed use of their work order system and their computer maintenance management system (CMMS) or enterprise asset management (EAM) system”. This definition extends beyond the classic LM concept of TPM including a reliability approach based on the RCM method. It indicates the need to identify hazards, assess their consequences and on this basis, determine the criticality of technical facilities and appropriate maintenance activities for the function performed by the facility.

LMn is based on a multidimensional management concept focused on the waste and losses elimination. [26]. Each maintenance operation is associated with unwanted side effects and wastes, such as [35]: (1) Over-maintenance; (2) Waiting for resources; (3) Task sequencing and scheduling; (4) Maintenance task processing; (5) Excessive inventory; (7) Motion; (8) Correction.

One of the main steps for improving the maintenance processes is to develop a system to identify VA (Value Added) and NVA (Non Value Added) activities and recognize the types wastes [76]. To achieve this LMn includes several tools and methods, such as: 5S, Value Stream Mapping (VSM), Single Minute Exchange od Die (SMED), TPM, Visual Management (VM) (Figure 1).

These methods and tools simplified maintenance processes and improve the maintenance performance.. The reduction of waste in maintenance means a reduce setup time and increase OEE [9, 57, 92], better management of consumable materials and spare parts [68], downtime reduction [36, 85] and lower the Mean Time To Repair (MTTR) and standardization of maintenance procedures [29]. Barnard [12] pointed out that lean can help to develop Reliability Pro-

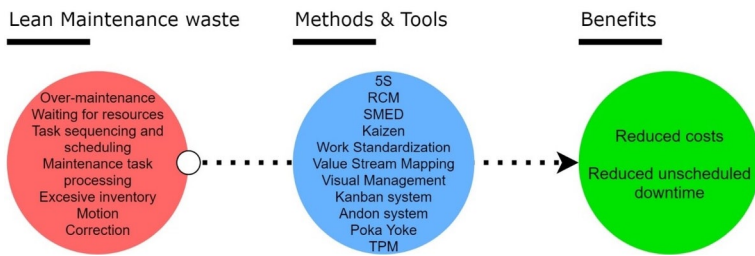


Fig. 1. From waste to benefits – Lean Maintenance perspective

gram Plan and to select only VA activities for execution. In the work [53] the authors suggest how LM principles can be adopted to LMn and underlined the importance of data in maintenance management process decision-making.

Evidence of LMn tools implementation is found in various sectors, such as the automotive industry [6, 67], aerospace industry [21], power plants [29] textile industry [7, 73], food industry [8], oil and gas industry [24, 76] among others. Such evidence points to a number of universality and the use of the LMn tools in different contexts and companies, increasing its importance as an approach to continuous improvement [30, 70, 86]. However, implementation of LMn tools / practices is time consuming and costly process and needs continuous efforts to get effective results. Furthermore, there is no roadmap, no unified model and standard answer on the way to achieve lean [93].

Many researchers are identified industrial problems regarding LM implementation [1, 59]. To support practitioners in effective implementation of LM methods and tools, various models suitable for different industries were developed [2, 16]. For selection of lean tools in a manufacturing organisation [47] propose fuzzy FMEA, AHP and QFD-based approach, [61] use of AHP method and illustrate based on example related to the construction works, [42] proposes the improved VIKOR method and idea of multiple criteria decision-making for LM tool selection, [80] applies grey method for LM tool selection.

The above analyzes show that the choice of LM practices is not a simple problem. Moreover, the benefits of implementing LM may be different [86]. Since maintenance management in manufacturing companies connects various function (organizational and business) and activities, LMn methods tools implementation is complex and requires knowledge and skills. Maintenance managers, a specially in small in medium-sized enterprises, have a problem of selecting the best in a given operational context of the enterprise. Thus, development of decision-making support tools can assist in LMn tools performance appraisal, facilitating appropriate LMn practices [29].

3. Research methodology

The purpose of this research was to identify the main factors impacting on effectiveness of LMn implementation in manufacturing companies. To archive this goal the machine learning (ML) method and rough set theory (RST) was proposed.

The research methodology consist of two stages. The first stage presents the results of the study, conducted in the manufacturing companies, concerning the maintenance management and lean tools implementation. Then, the obtained data was pre-proceed and statistical analyses was performed (Section 3.1)

In the second stage firstly the data set was divide into two sets: training and test data set. Then the decision trees (DT) (Section 3.2) and RST (Section 3.3) to generate the decision rules were used. The main goal of this stage was to generate the decision rules, which shows the relationships between the activities undertaken as part of the implementation of the lean maintenance concept and the results achieved. DT and RST were used for the variable of the number of unplanned downtime (NUD) indicator. Finally the obtained results were compared (Section 3.4). The detailed research methodology on Figure 2 is presented.

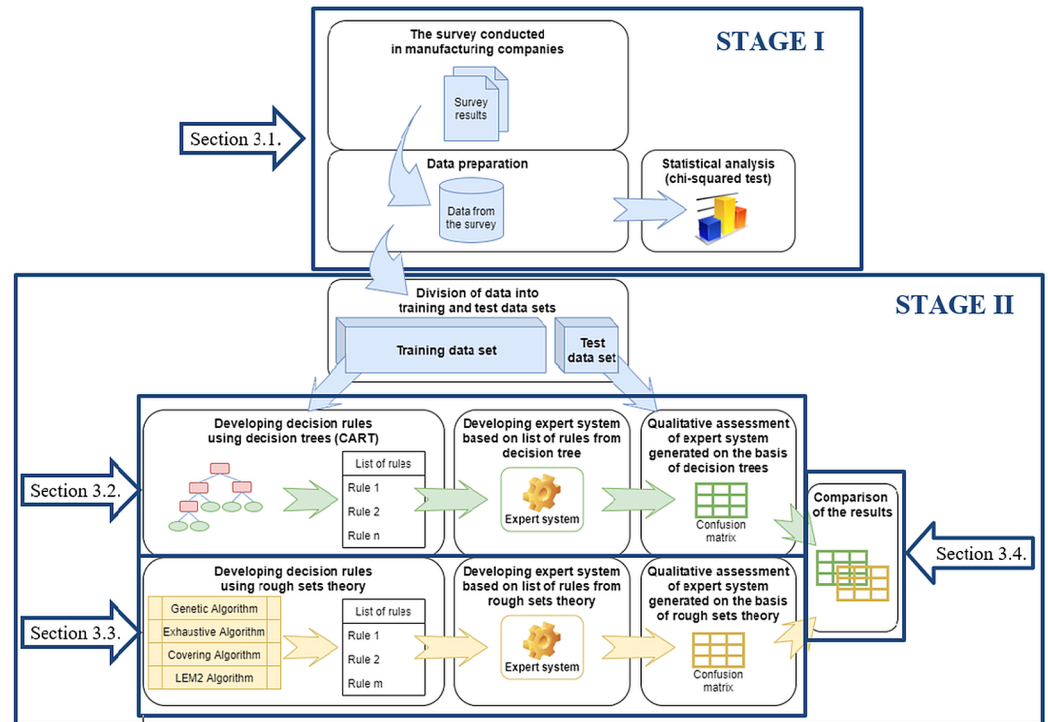


Fig. 2. The research methodology

3.1. Data collection and preliminary analysis

In the first stage the data for the research in manufacturing companies were collected. For participation in this research the companies of various sizes and from various industries were invited. The research involved companies that had been implementing the LMn concept for at least 5 years such as SMED, TPM, 5S. For the research the survey method was used. The research involved mainly representatives of top and middle management as well as employees directly related to the supervision of the maintenance process in the company. An important element of the research was to obtain information about the types of benefits identified by enterprises after the implementation of LMn tools such as: TPM, 5S and SMED. The obtained data from the survey was adequately prepared. The first stage was their pre-processing, which included data selection and cleaning. The purpose of this step was to remove inconsistent or erroneous data. In the data preparation the processing technique by removing the missing data was used. This had the effect of reducing the size of the dataset After then, the statistical analyse for identification the factors which have the impact on the NUD value in surveyed companies was used. In Section 4.1 and 4.2 the results of the first stage of the research are presented.

3.2. Machine learning and decision trees

In the second stage firstly the pre-proceed data set was divided into two sets: training and test data set. The training data set for developing the classification models was used. However, the test set for them validation was used. Firstly the machine learning method (decision trees) for generating the decision rules (classification model) was used.

ML combines solutions from the fields of statistics, computer science, cognitive sciences, recognition theory and many other fields [14]. Developed in the nineties of the last century, data mining methods are one of the most widely used IT tools at the present time [33]. These methods are included in modern applications. Moreover, these methods are used by the middle and top management level to make decisions based on the knowledge “retrieved” from the internal documentation of the organization and the results of the conducted research. The use of machine learning methods is divides in three stages: data preparation, data analysis (model building) and implementation. ML methods were successfully implemented in many different areas [14, 65] also in maintenance management [43, 46, 74, 87, 90].

One of the ML methods used for constructing the models are DT. DT are the one of the most popular and effective methods of ML [13]. DT are built mostly recursively (top-down approach) [34, 71].

DT construction is performing by in-depth search of all available variables and all possible splits in the data set for each decision node (t) by choosing the optimal partition [48]. $\{(y_i, x_i)\}_{1 \leq i \leq n}$ denotes the analysed data set, where $y_i \in \{c_1, c_2, \dots, c_s\}$ and $x_i = (x_{i1}, x_{i2}, \dots, x_{ik}) \in R^k$. The values c_1, c_2, \dots, c_s means possible classes characteristic y . The task of classification consists is to divide space R^k on q separated areas, where each area corresponds to a certain class. Based on the ob-

servation of the characteristics $x_i = (x_{i1}, x_{i2}, \dots, x_{ik})$ can be analyzed object classification [3].

In this study the Classification and Regression Trees (CART) algorithm was used. This algorithm is one of the basic algorithms proposed by [18]. The Gini index, also called as the impurity measure, has been proposed by the authors of the algorithm. The entire space R^k is divided into q separated regions, $R_1 \cup R_2 \cup \dots \cup R_q = R^k$. For the node m , $1 \leq m \leq q$, representing region R_m , the Gini index is determined as follows (1) [3]:

$$Q_G(m) = \sum_{j=1}^s p_{mj}(1 - p_{mj}) = 1 - \sum_{j=1}^s p_{mj}^2 \quad (1)$$

where p_{mj} is a conditional probability for j -th class in a node, s – a number of classes. In node m with n_m observations the conditional probability for j -th class is equal (2):

$$p_{mj} = \frac{\#\{y = c_j : x \in R_m\}}{n_m} \quad (2)$$

The decision rule generated by CART algorithm were used to develop an expert system (with the use of PC-Shell /Aitech Sphinx). In the system, for creation the knowledge base two blocks: facet and rules were used. For declaration the values and attributes of decision the facets block was used. In the decision nodes the explanatory variables as decision attributes were placed. The target attribute represented the results of system inference. The NUD value was finally obtained in a separate output window.

For validation the developed decision rules in the expert system the data from companies (test set data) was used. Then, the confusion matrix and k-fold cross-validation to assess the quality of developed DT was used. In the confusion matrix the following values were determined: TP (True Positive), TN (True Negative), FP (False Positive) and FN (False Negative). To assess the quality of the developed classifier the indicators proposed by [31, 62, 83] were used (Table 1).

In Section 4.3 the results of the this step of the research are presented.

3.3. Rough Set Theory

For developing the second classification model the RST was used. This theory is recognized as a tool that allows to reduce the input dimension and finds a way to reduce the uncertainty and ambiguity of data. Recently, there has been a very rapid development in this area and the possibilities and application of this theory in ML and decision-making systems. [50, 64, 81]. The main advantage of this theory is the ability to find the relationship between the explanatory variables and the dependent variables, which allows to support the decision-making process based on data analysis. Moreover, RST allows for dimensionality reduction (elimination of explanatory variables that have no influence on the explained variables). Knowledge extracted using RST is generated in the form of decision rules [50].

The formal description of the rough set theory in the works [63, 64] is presented. In order to start data analysis using this theory, the concept of an information system and a decision table should be defined. Let S be a decision system define as $S = \langle U, A, V, f \rangle$. Where U is a non-empty, finite

Table 1. Indicators - quality of DT

No.	Indicator	Formula
1.	Accuracy (Acc)	$Acc = \frac{TP + TN}{TP + TN + FP + FN}$
2.	Overall error rate (Err)	$Err = \frac{FP + FN}{TP + TN + FP + FN}$
3.	True positives rate (TPR)	$TPR = \frac{TP}{TP + FN}$
4.	True negatives rate (TNR)	$TNR = \frac{TN}{TN + FP}$
5.	Positive predictive value (PPV)	$PPV = \frac{TP}{TP + FP}$
6.	Negative predictive value (NPV)	$NPV = \frac{TN}{TN + FN}$
7.	False positive rate (FPR)	$FPR = \frac{FP}{FP + TN} = 1 - TNR$
8.	False discovery rate (FDR)	$FDR = \frac{FP}{FP + TP}$
9.	False negatives rate (FNR)	$FNR = \frac{FN}{TP + FN} = 1 - TPR$
10.	Matthew's corr. coefficient (MCC)	$MCC = \frac{TP \times TN - FP \times FN}{\sqrt{(TP + FN)(TP + FP)(FN + TN)(FP + TN)}}$
11.	F1-score (F1)	$F1 = \frac{2 \times PPV \times TPR}{PPV + TPR}$
12.	Youden's J statistic (J)	$J = TPR + TNR - 1$

set of n objects $\{x_1, x_2, \dots, x_n\}$, called the universe. A is a non-empty, finite set of m attributes $\{a_1, a_2, \dots, a_m\}$ which characterize the analyzed objects. On the other hand, $V = \bigcup_{a \in A} V_a$, where V_a is called the domain of the attribute $a \in A$, which contains the values of this attribute. In turn $f: U \times A \rightarrow V$ is an information function such that $\bigwedge_{a \in A, x \in U} f(a, x) \in V_a$. An information system (IS) is called a decision table DT when there are separate sets of conditional C attributes and decision attributes D such as: $C \cup D = A$ and $C \cap D = \emptyset$. Then the decision table DT is described as follows: $DT = \langle U, C, D, V, f \rangle$. Using the properties of RST allows for extending the possibilities of such a table, which leads to a significant simplification of the rules. Consequently, the decision-making system takes on the features of generalization and constitutes an effective and intelligent data processing tool. RST proposes to replace an imprecise concept with a pair of precise concepts, called the lower and upper approximation of this concept [69]. The difference between the upper and lower approximations is precisely the boundary area to which all cases belong that cannot be correctly classified on the basis of current knowledge. If $IS = \langle U, A, V, f \rangle$ is an IS such that $B \subset A$ and $X \subset U$ are: B^* – the lower approximation of the set X in the IS, is the set: $XB^* = \{x \in U : B(x) \subseteq X\}$; B^* – the upper approximation of the set X in the IS is the set: $XB^* = \{x \in U : B(x) \cap X \neq \emptyset\}$; B – positive area of the set X in the IS we call the set: $POS_B(X) = XB^*$; B – the boundary of the set X in the IS we call the set: $BN_B(X) = XB^* - XB^*$; B – a negative region of X in the IS is the set: $NEG_B X = U - XB^*$. The definitions formulate the following conclusions: $XB^* \subset X \subset XB^*$; X is B when: $XB^* = XB^* \Leftrightarrow BN_B X = \emptyset$ and X is B -approximate when: $XB^* = XB^* \Leftrightarrow BN_B X \neq \emptyset$.

The lower approximation of the concept is therefore the area that defines all the objects that there is no doubt that they represent the concept in the light of the possessed knowledge. The upper approximation includes objects that cannot be ruled out that they represent this concept [20]. The edges are all those objects for which it is not known whether or not they represent a given set. There is also the so-called a numerical characteristic of the approximation of a set, which, using the coefficient of accuracy of the approximation (approximation), allows us to quantitatively characterize the blurriness of concepts [44].

In this study the RST allowed to generate a set of decision rules that can be used to construct decision systems. They are usually created in four iterative steps: identification of possible sets of values, isolation of conditional attributes (premises) and decision attributes, creation of decision rules in the form of IF - THEN, implementation in the decision system.

As in the case of DT the developed decision rules were implemented in the expert system. Moreover, the data test set to validate the decision rules and to assess the quality of the classifier the same indicators were used. The results of this step of the research in Section 4.4 are presented.

3.4. Comparison of the results

In the last step of the research the comparison of the results obtained from the assessment of developed classification models by DT and RST was performed. In the comparison the value of the indicators for DT and RST (Table 1) was analyzed. The analyses for the most frequently occurring classes was performed. In Section 4.5 the results of this step of the research are presented.

4. Results and analyses

4.1. The structure of the surveyed companies

The research was carried out in manufacturing companies in Podkarpackie Voivodship (Poland). The companies participating in the

study used various methods and tools of LMn. Figure 3 shows the percentage of surveyed companies implemented various tools of LMn.

The research was carried out in manufacturing companies in Podkarpackie Voivodship (Poland). The companies participating in the study used various methods and tools of LMn. Figure 3 shows the percentage of surveyed companies implemented various tools of LMn.

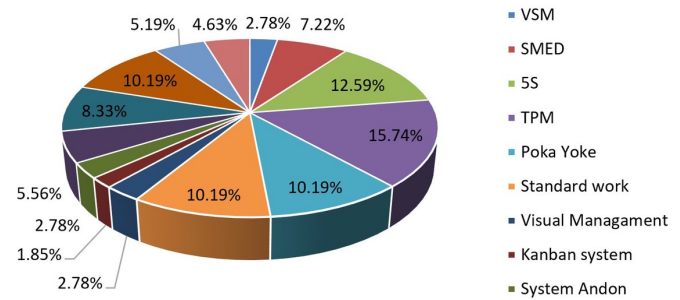


Fig. 3. Structure of the companies - LMn implementation

The surveyed companies were classified, inter alia, according to the following criteria: size of the organization, type of production, type of industry, and maintenance strategy. In the research the biggest group were large companies (70.77%) and companies from aviation industry (41.54%) and also companies with large batch production (25.68%) (Fig. 4, 5 and 6).

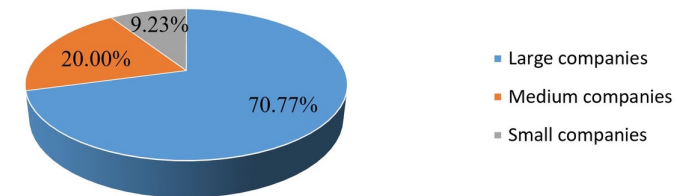


Fig. 4. Structure of the companies - the size of the company

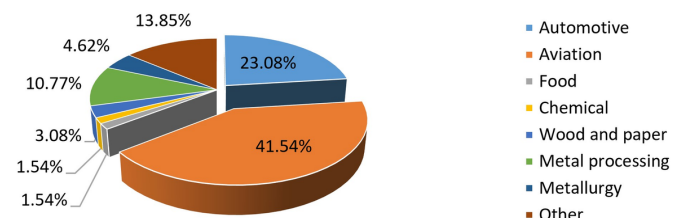


Fig. 5. Structure of the companies - the type of industry

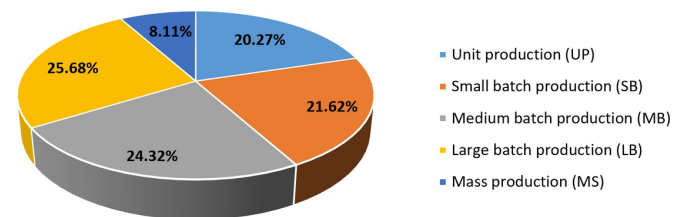


Fig. 6. Structure of the companies - type of production

In the analysed companies dominated preventive maintenance (PM) strategy, in particular: maintenance scheduled inspections (PM), maintenance scheduled inspections and repairs (PM) and autonomous maintenance (AM) (Fig. 7).

The implementation of the TPM system in the production plant significantly facilitates the process of supervising machines and technological devices. The main benefit of implementing TPM is the awareness of employees who, in conflicts and accompanying problems, find opportunities for continuous improvement. The decisive role in

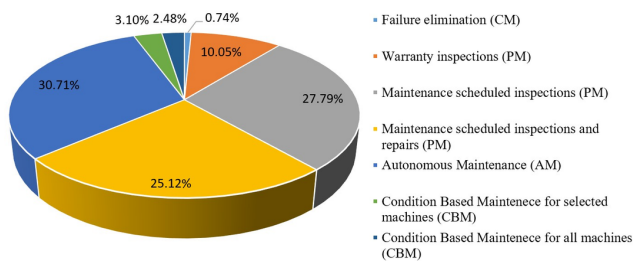


Fig. 7. Structure of the companies - maintenance strategy

assessing the effectiveness of TPM implementation in the enterprise allows the ongoing monitoring of the effects of TPM implementation. Many of the surveyed companies emphasized that the main effect is to reduce the number of unplanned downtime (UD). Any sudden shutdown of a machine from the production process was called an unplanned downtime. The most common reason for such a downtime is a mechanical, electrical or electronic failure, which poses a risk to safety at the workplace and failure to maintain proper operating parameters. To assess the effectiveness of the implementation of the LMn concept, enterprises used mainly OEE indicator and the number of unplanned downtimes (NUD). The research results concerning OEE are presented in the work [4]. This paper presents the results of the impact of LMn concept implementation on reducing the number of unplanned downtimes (NUD).

Figures 8 and 9 show the effects of implementing the LMn system – decreasing of NUD, in the surveyed companies. The analysis of this indicators was based on the following criteria: enterprise size and industry. When analyzing the results presented in Fig. 6, it should be noted that in the surveyed companies, the implementation of LMn most often resulted in a reduction of NUD in the range of 10-30% in the case of medium and large companies. The least, however, is above 50%. Small companies most often reported a reduction of NUD of less than 10%.

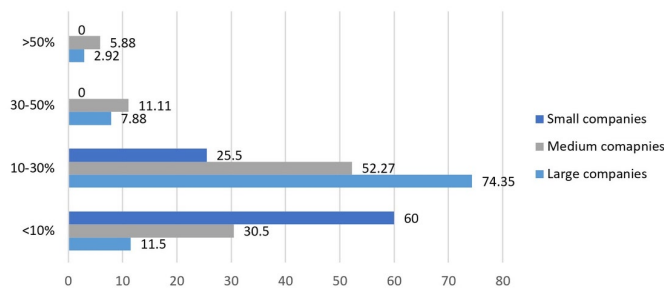


Fig. 8. The effects of implementing the LMn system (decreasing of NUD) – size of the company

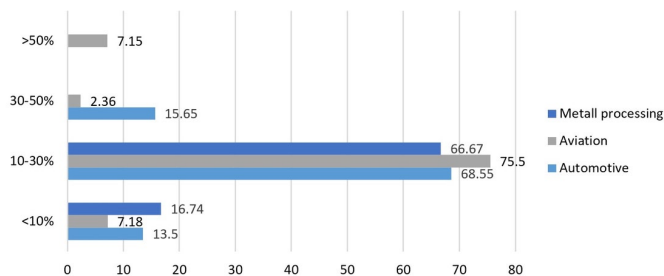


Fig. 9. The effects of implementing the LMn system (decreasing of NUD) – industry

The companies from various industries most often indicated a reduction in unplanned downtime also in the range of 10-30%. In 7.15%

of the aviation industry enterprises, NUD indicator is reduced by more than 50%.

4.2. Statistical analyses

Table 2 presents the analyzed factors which have potential influence on NUD indicator and the p-value.

Table 2. Potential factor influencing on NUD indicator and p-value

Number	Factor	p-Value
		NUD
1	The size of the company	0.318
2	Type of production in the company	0.383
3	Type of industry	0.262
4	Type of ownership of the company	0.680
5	Company situation	0.540
6	Type of capital in the companies	0.210
7	Types of machines owned	0.102
8	5S implementing	0.284
9	SMED implementing	0,001
10	Kanban system for spare parts implementing	0.312
11	The way of supervision in the companies	0.412
12	The type of supervision in the companies	0,000
13	The MTTR value	0.071

For the analyzed Hypotheses 9 and 12, there is a statistically difference in the value of the NUD indicator (p-value NUD = 0.001 and NUD = 0.000 - H0 rejected, H1 accepted). It means that there is a statistically justified difference in reducing the NUD from the factors studied. This proves that in the surveyed companies, decreasing the NUD depends on the implementation of the SMED method and from different types of supervision.

The presented analyzes allowed to identify the factors that have impact on the effectiveness of LMn. Moreover, the analyses showed the, which factors did not have the influence on the effectiveness of LMn. Despite the analyzed single factors, for example, such as: types of machines, Kanban, the way of supervision in the companies, it does not have a significant impact on the effectiveness of LMn, their interaction with other factors may already have a significant impact on the LMn effectiveness.

Therefore, in the next stage of the research, the concept of using ML method an RST to search for relationships between the identified factors, and thus their impact on the effectiveness of the LMn concept implementation, was proposed.

4.3. Decision trees in evaluation the effectiveness of Lean Maintenance implementation

Not all surveyed companies used the same LMn tools and methods, therefore CART decision trees were used for analysis. The main criterion for selecting this method was the possibility of its effective use for data sets that have numerous shortcomings in the independent variables. Moreover, this method is insensitive to the occurrence of atypical observations that may come from a different population. The CART classification tree for the dependent variable - reduction in the number of unplanned downtimes (NUD) was developed for the studied group of companies.

In the decision tree the training data set (from 65 companies) and the variables e.g. size of the companies, type of industry, type of production whose impact on the effectiveness of LMn implementation were analyzed (Table 2) as explanatory variables (predictors) were adopted. In addition, the following indicators were introduced: the TPM number of actions indicator (NTPMA), the number of preven-

tive actions indicator (NPA) and the maintenance strategy indicator (MSI). The NPA is the activities number to prevent UD. The NTPMA indicator is calculated as the sum of the value of activities by the maximum number of implemented activities (3):

$$NTPMA = \frac{\sum_{i=1}^{11} x_i}{\text{max number of activities}} * 100\% \quad (3)$$

The NTPMA indicator can take values on four levels from low to very high. The calculation of the MSI indicator value is assumed as: the sum of the activities value by the number of implemented activities (4).

$$MSI = \frac{\sum_{i=1}^n x_i}{n} \quad (4)$$

Detailed information about these indicators are presented in the work [4, 5].

While building the tree, the following assumptions were made: the costs of misclassifications were equal, the Gini measure as a measure of goodness, the discontinuation of the process of creating new nodes using trimming according to the variance (the stop rule) and the minimum frequency criterion in the split node, and a 10-fold cross validation as a quality measure. A developed tree consists of 15 divided nodes and 16 end nodes, which means that 16 decision rules may be defined. The developed decision tree is presented on Figure 10.

Selected decision rules were defined for the developed tree. These rules were defined for the end nodes that achieved the best results in reducing NUD using additional LMn methods and tools. Based on the decision tree, the chosen decision rules were defined:

1. If the company's type of supervision expressed by the MSI indicator is different than 5.5, the 5S method is implemented in different areas, it is not a representative of the metal processing industry, it is not a small enterprise and implements a different type of production than small batch production (MS), it achieves a reduction in the NUD in the range from 10 to 30%.
2. If in the enterprise the supervision method expressed by the MSI indicator is different than 5.5, the 5S method is implemented in various areas, it is not a representative of the metal processing industry, the supervision method expressed by the MSI indicator is not equal to 5 or 4, mainly has numerical machines or referred to as "other" machines achieve a reduction in the NUD indicator in the range of 10 to 30%.

3. If in the enterprise the supervision method expressed by the MSI indicator is different than 5.5, the 5S method is implemented in various areas, it is not a representative of the metal processing industry, the supervision method expressed by the MSI indicator is not equal to 5 or 4, mostly it has conventional machines and an average repair time of over 24 hours achieve a reduction in NUD by more than 50%.

In order to evaluate the quality of the developed classification model (DT), the validation for the test data was performed.

The obtained decision rules were used to develop the expert system. For validation the developed decision rules in the expert system the data from 25 companies was used. Among the analyzed companies, the major group were large companies (70%) mainly from the aviation industry (40%). Large batch production dominated (35%) in these companies. Then, using the obtained results the classification quality of the developed decision rules were tested.

The purpose of the qualitative analysis was to generate confusion matrices for the most frequently occurring classes. When developing the confusion matrix, the analyzed class was considered as positive, while other classes were considered as negative. Tables 3 and 4 present confusion matrices for the classifier - the value of NUD for the two the most frequently occurring classes: 10-30% and 30-50%.

Table 3. Confusion matrix for the classifier value of the NUD 10 - 30 % class

Real Classes	Predicted Classes	
	Positive	Negative
Positive	11	1
Negative	0	13

Table 4. Confusion matrix for the classifier value of the NUD 30 - 50 % class

Real Classes	Predicted Classes	
	Positive	Negative
Positive	11	0
Negative	2	12

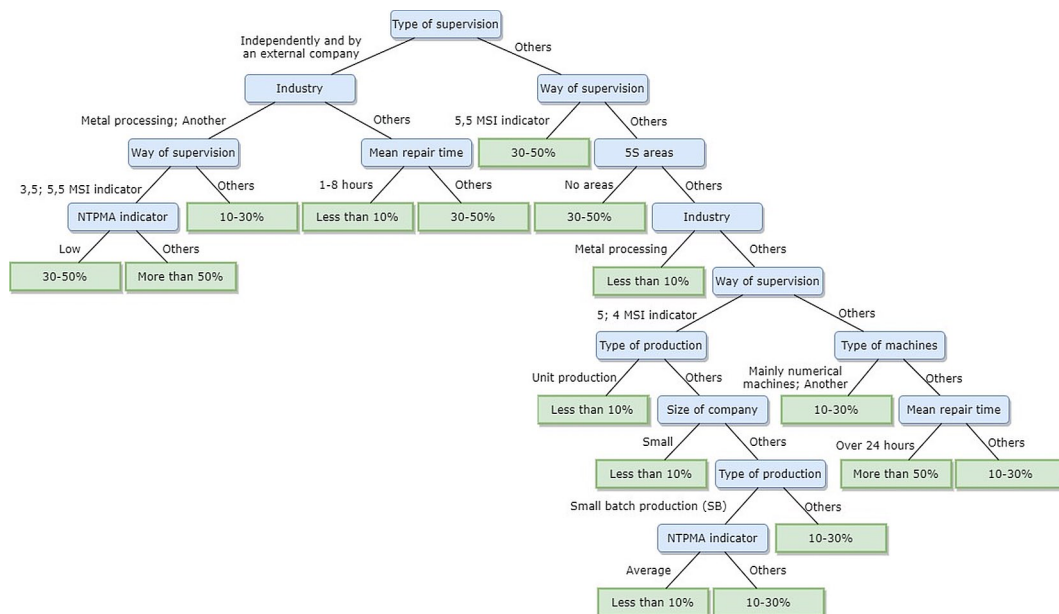


Fig. 10. The developed decision tree

The indicators from Table 2 have been used to assess the quality of the classifier (Table 5).

Table 5. Indicators used to assess the quality of classifier

Indicators			Acc	Err	TPR	TNR	PPV	NPV	FPR	FDR	FNR	MCC	F1	J
Classifier: NUD value	Marked class	30-50%	1.00	0.00	1.00	1.00	1.00	1.00	0.00	0.00	0.00	1.00	1.00	1.00
		10-30%	0.96	0.04	0.92	1.00	1.00	0.93	0.00	0.00	0.08	0.92	0.96	0.92

For easier analysis the results presented in the Table 5, the indicators into two groups were divided. The first (marked in red) contains indicators, of which the value should be as small as possible - in the case of the classifier without errors, the result will be 0. The second of them (other indicators) contains indicators, of which the expected value should be as high as possible = 1. The results presented in the table indicate that the NUD classifier in the 30-50% class is more likely to assign objects to the class to which in fact belong (Acc = 1). For the 10-30% class, the Acc is 0.96, which means that Err = 0.04.

The main goal of the validation was to confirm, that the developed decision rules actually lead to the planned results. The obtained values of calculated indicators confirmed the high usefulness of the classifiers.

4.4. Theory of Rough Sets in Lean Maintenance implementation assessment

In this stage the RST for the described variable NUD was used. In the analyses the same training data set as input (data from 65 companies and explanatory variables (predictors)) were adopted. The following algorithms were used to generate the decisions rules: exhaustive algorithm (ExhAlg), coverage algorithm (CovAlg), genetic algorithm (GenAlg) and LEM2 algorithm. The scheme for the explained variable “reduction in the NUD” is presented on Figure 11.

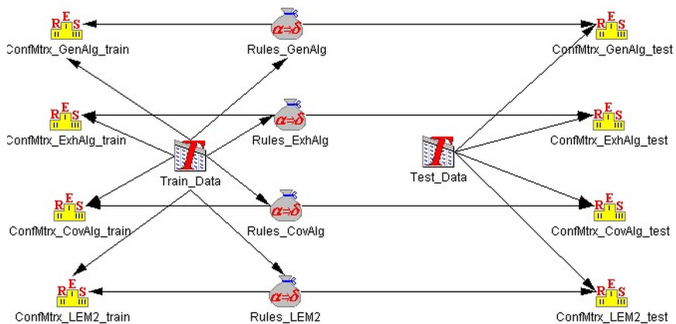


Fig. 11. The scheme for the explained variable “reduction in the NUD”

In Table 6 number of decision rules generated by each algorithm are presented.

Table 6. The number of decisions rules generated for the explained variable NUD

Name of a Rule Set	Number of Rules
NUD_ExhAlg	6920
NUD_GenAlg	458
NUD_CovAlg	43
NUD_LEM2	27

The rules generated by each algorithm were used to classify the NUD indicator. The classification of objects (companies) from the appropriate decision tables was performed. The standard voting method was used for classification. The results of the classification for each of the algorithms in the form of a confusion matrix is presented. The rows of the matrix show the values for the actual decision classes (the values of the dependent variable). On the other hand, in the columns of the matrix the results of prediction are presented. Additionally, the matrix contains the information about the number of objects belonging to a given decision class, accuracy and coverage. Moreover, a true positive rate is presented.

In the Table 7 the results of classification for GenAlg, ExhAlg and LEM2 are presented. In the case of the explained variable NUD, the confusion matrices were the same for these algorithms. All 65 objects in the decision table were correctly classified (Total Acc = 1).

In the Table 8 and 9 the results of the classification for CovAlg with different value of coverage parameter are presented.

In the case of rules created by the coverage algorithm it was different. When assuming a small value of the coverage equal to 0.001 or less, the algorithm generates rules that give the maximum coverage calculated for all decision classes jointly. It is approximately 0.977 (Table 8). However, with this value of the coverage factor, the classification accuracy is not maximum - it amounts to 0.95. It is caused by an incorrect classification of three objects which have been assigned to the class > 50%. In fact, these objects belong to the decision class of 10-30%. To increase the accuracy of the classification the value of the coverage should be increased. Already for the coverage value equal to 0.12, the accuracy is 1, which means no classification errors (Table 9). However, the coverage is less than that generated previously, and is approximately 0.895. This is due to the lack of classification of two objects from classes <10%, two objects from the class 10 - 30% and one object from the class 30 - 50%.

As in the case of decision trees, the developed decision rules were implemented in the expert system. Again, the data from 25 companies to validate the decision rules was used. To assess the quality of the classifiers the confusion matrices were developed. These confusion matrices by comparison of the results from the studied companies with the result from the expert system were performed. In the Table 10 the results of NUD classification for the LEM2 algorithm are presented. Total Accuracy for this algorithm is 0.958.

In the Table 11 the results of the classification for CovAlg are presented.

Total Accuracy for this algorithm is 0.940, which means that the ability of this classifier is lower than in the case of LEM2 algorithm. In the Table 12 the results of the classification for ExhAlg are presented. Total Accuracy of this classifier is 0.980.

The best results for GenAlg algorithm were obtained. All 25 objects in the decision table were correctly classified (Total Accuracy = 1).

4.5. Results comparison

In the Table 13, the comparison of the results for the most frequently occurring classes: 10-30% 30-50% is presented. The comparison presents the indicators values for the models generated using DT and RST.

Results for the genetic algorithm are not included in the Table 13, because the results are the same as for exhaustive algorithm in the marked class of 10-30%. Considering the 10-30% class, the Accuracy ratio shows that the genetic algorithm and the exhaustive algorithm are most likely to assign objects to the class to which they actually belong. Only a slightly worse Accuracy result was obtained for the

Table 7. Confusion matrix - GenAlg, ExHAlg and LEM2

Actual	Predicted						
	< 10%	10-30%	30-50%	> 50%	No. of obj.	Accuracy	Coverage
< 10%	44	0	0	0	44	1	1
10-30%	0	10	0	0	10	1	1
30-50%	0	0	6	0	6	1	1
> 50%	0	0	0	5	5	1	1
True positive rate	1	1	1	1			
Total Accuracy	1						
Total Coverage	1						
Total no. of obj.	65						

Table 8. Confusion matrix - CovAlg (coverage value = 0.001)

Actual	Predicted						
	< 10%	10-30%	30-50%	> 50%	No. of obj.	Accuracy	Coverage
< 10%	0	40	0	3	44	0.91	0.98
10-30%	9	0	0	0	10	1	0.90
30-50%	0	0	6	0	6	1	1
> 50%	0	0	0	5	5	1	1
True positive rate	1	1	1	0.6			
Total Accuracy	0.977						
Total Coverage	0.95						
Total no. of obj.	65						

Table 9. Confusion matrix - CovAlg (coverage value = 0.012)

Actual	Predicted						
	< 10%	10-30%	30-50%	> 50%	No. of obj.	Accuracy	Coverage
< 10%	0	42	0	0	44	1	0.95
10-30%	8	0	0	0	10	1	0.80
30-50%	0	0	5	0	6	1	0.83
> 50%	0	0	0	5	5	1	1
True positive rate	1	1	1	1			
Total Accuracy	1						
Total Coverage	0.895						
Total no. of obj.	65						

Table 10. Confusion matrix - LEM2

Actual	Predicted						
	< 10%	10-30%	30-50%	> 50%	No. of obj.	Accuracy	Coverage
< 10%	3	0	0	0	3	0.917	1
10-30%	1	8	0	0	9	0.958	1
30-50%	0	0	10	0	10	1.000	1
> 50%	1	0	0	1	2	0.958	1
True positive rate	0.6	1	1	1			
Total Accuracy	0.958						
Total Coverage	1						
Total no. of obj.	25						

other two RST algorithms and for DT. The Accuracy results for the 30-50% class are different. The maximum value was obtained for the LEM2 algorithm, the genetic algorithm and for DT. The lowest value was recorded for the coverage algorithm. Similar conclusions can be drawn by looking at the general classifier error (Err) (keeping in mind that the lower the value of the Err, the better the classifier). This shows that the ability to predict of the models created varies depending on the NUD indicator, and the results contained in discussed table may be valuable for future users of the developed models.

The differences in the results can also be seen in cases of sensitivity (TPR), which shows the ability to recognize objects belonging to the distinguished class. For the 30-50% class, the TPR indicator obtained the maximum value for all models except for the classifier generated with the coverage algorithm. However, in the case of the 10-30% class, the LEM2 and DT algorithm did not reach the value of 1. The results of the TPR index are very similar to the NPV, which indicates the probability that an object assigned to the unmarked class by the classifier actually belongs to this class.

One of the best results was obtained for the TNR index, which indicates the ability to correctly classify objects not belonging to the marked class. Comparing the TNR and TPR values for the LEM2 algorithm and DT in the 10-30% class, it can be seen that these classifiers better recognize objects not belonging to this class. A similar situation occurs for the coverage algorithm in the 30-50% class. The values of the Precision index (PPV) were almost identical to those in the TNR.

In the case of the last three indicators from Table 12 (Matthew's correlation coefficient, F1-score, and Youden's J statistic), the results calculated for each of them are similar. All three indicators show that the best classifiers for the marked class 10-30% are classifiers built on the basis of the exhaustive algorithm and the genetic algorithm. However, for the class 30-50%, the best classifiers come from the LEM2 algorithm, the genetic algorithm and DT.

The probability of omitting marked objects by assigning them to an unmarked class is called FNR. This indicator is the lowest in the case of the exhaustive, coverage and genetic algorithms in the 10-30% class. However, in the 30-50% class, all classifiers have the lowest possible FNR value, except for the classifier built on the basis of the coverage algorithm. On the other hand, the FPR and FDR indicators, which refer to the probability of so-called false alarms generated by the classifier, show that the mentioned probability is equal to zero for all classifiers except CovAlg in the 10-30% class, as well as ExHAlg and CovAlg in the 30- class 50%.

Table 11. Confusion matrix - CovAlg (coverage = 0.12)

Actual	Predicted						
	< 10%	10-30%	30-50%	> 50%	No. of obj.	Accuracy	Coverage
< 10%	3	0	0	0	3	1.000	1
10-30%	0	9	0	0	9	0.960	1
30-50%	0	1	9	1	11	0.880	1
> 50%	0	0	1	1	2	0.920	1
True positive rate	1	0.9	0.9	0.5			
Total Accuracy	0.940						
Total Coverage	1						
Total no. of obj.	25						

Table 12. Confusion matrix - ExhAlg

Actual	Predicted						
	< 10%	10-30%	30-50%	> 50%	No. of obj.	Accuracy	Coverage
< 10%	2	0	1	0	3	0.960	1
10-30%	0	9	0	0	9	1.000	1
30-50%	0	0	10	0	10	0.960	1
> 50%	0	0	0	3	3	1.000	1
True positive rate	1	1	0.91	1			
Total Accuracy	0.980						
Total Coverage	1						
Total no. of obj.	25						

Table 13. Comparison of results - DT and RST

Indicators	Classifier: reducing the NUD Value							
	Marked Class							
	10-30%				30-50%			
	DT	RST			DT	RST		
LEM2		Exh.Alg.	Cov.Alg.	LEM2		Exh.Alg.	Cov.Alg.	
Acc	0.960	0.958	1.000	0.960	1.000	1.000	0.960	0.880
Err	0.040	0.042	0.000	0.040	0.000	0.000	0.040	0.120
TPR	0.920	0.889	1.000	1.000	1.000	1.000	1.000	0.818
TNR	1.000	1.000	1.000	0.938	1.000	1.000	0.933	0.929
PPV	1.000	1.000	1.000	0.900	1.000	1.000	0.909	0.900
NPV	0.930	0.938	1.000	1.000	1.000	1.000	1.000	0.867
FPR	0.000	0.000	0.000	1.000	0.000	0.000	1.000	0.333
FDR	0.000	0.000	0.000	0.100	0.000	0.000	0.091	0.100
FNR	0.080	0.111	0.000	0.000	0.000	0.000	0.000	0.182
MCC	0.920	0.913	1.000	0.919	1.000	1.000	0.921	0.757
F1	0.960	0.941	1.000	0.947	1.000	1.000	0.952	0.857
J	0.920	0.889	1.000	0.938	1.000	1.000	0.933	0.747

5. Conclusions

Many companies use LM mainly to eliminate production losses. These companies not only increase their productivity, but also strengthen their position on the market. It turns out that companies have started to recognize the importance of maintenance, so they have started implementing LMn.

In this paper the problem of LMn implementation assessment was analyzed. Firstly the data from the manufacturing companies were

collected and preliminary analyzed. The chi-square test for identification the factor affecting for LMn were used.

Then, the machine learning method to developed the classification models was proposed. These models by using DT (CART) and RST (four different algorithms: LEM2, Exh.Alg. Cov.Alg and GenAlg). were developed. To develop these models, data obtained from companies, that implemented LMn were used. In the first stage of the survey, information from companies was collected on: used maintenance strategies, implemented LMn methods and tools, and the results of the implementation. To assess the benefits of the LMn implementation the indicator NUD was analyzed.

The obtained results indicate, that both for the classifiers obtained, RST and DT have a high prediction ability. However, the accuracy of the prediction depends from the analyzed class. The predictive model generated by DT show the better prediction ability in the analyzed class 30-50%. However, the situation in RST is slightly different. The same high prediction ability was demonstrated by the model generated with the use of the genetic algorithm. For the two most frequently occurring classes, this model has the same high predictive ability. However, better accuracy for the class of 30-50% were achieved for RST for LEM2 algorithm. It should be noted that

this algorithm generates the smallest number of decision rules. This shows that a large number of decision rules is not required to obtain good ability of prediction models. For the 10-30% class, the best prediction ability was obtained for the model with the use of the coverage algorithm. The worst prediction ability for the most frequently occurring classes was achieved by models generated with the use of the coverage algorithm.

The created models have some limitations. First of all, these models were developed only based on a small group of companies in

the specific region. Secondly, despite the fact that companies of various sizes and from various industries were invited to participate in the research, large enterprises from the aviation industry were the largest group. As a result, the developed models are based primarily on the experience and effective implementations of LMn by these companies. Therefore, it may be a potential limitation of the implementation of these models in practice. Finally, a high level detailing has been taken to develop the model using DT. This can over-fit the model to the data. Thus, it is planned to continue relevant research in the future to eliminate the limitations of the developed models.

Although the conducted research has some limitations, the presented results can be used by all manufacturing companies to predict and assess the effectiveness of the implementation of LMn methods and tools. In addition, the research results can be used by companies and scientists for the effective organization of maintenance, selection of an appropriate maintenance strategy, but above all for improvement of already implemented activities in this area.

References:

1. Amin MA, Alam MR, Alidrisi H, Karim MA. A fuzzy-based leanness evaluation model for manufacturing organisations. *Production Planning & Control* 2021; 32(11): 959-974, <https://doi.org/10.1080/09537287.2020.1778113>.
2. Antony J, Psomas E, Garza-Reyes JA, Hines P. Practical implications and future research agenda of lean manufacturing: a systematic literature review. *Production Planning & Control* 2020;1-37, <https://doi.org/10.1080/09537287.2020.1776410>.
3. Antosz K, Mazurkiewicz D, Kozłowski E, Sęp J, Żabiński T. Machining Process Time Series Data Analysis with a Decision Support Tool. In: Machado J., Soares F., Trojanowska J., Ottaviano E. (eds) *Innovations in Mechanical Engineering. ICIENG 2021. Lecture Notes in Mechanical Engineering*. Springer, Cham. 2021; 14-27, https://doi.org/10.1007/978-3-030-79165-0_2.
4. Antosz K, Paško Ł, Gola A. The use of intelligent systems to support the decision-making process in Lean Maintenance management IFAC PAPERSONLINE 2019; 52(10): 148-153, <https://doi.org/10.1016/j.ifacol.2019.10.037>.
5. Antosz K. *Metodyka modelowania oceny i doskonalenia koncepcji Lean Maintenance*, OW PRZ, Rzeszów, 2019.
6. Arlinghaus JC, Knizkov S. Lean Maintenance and Repair Implementation - A Cross-Case Study of Seven Automotive Service Suppliers. *Procedia CIRP* 2020; 93: 955-964, <https://doi.org/10.1016/j.procir.2020.03.144>.
7. Arrascue-Hernandez G, Cabrera-Brusil J, Chavez-Soriano P, Raymundo-Ibañez C, Perez M. LEAN maintenance model based on change management allowing the reduction of delays in the production line of textile SMEs in Peru. In *IOP Conference Series: Materials Science and Engineering* 2020; 796(1): 012017, <https://doi.org/10.1088/1757-899X/796/1/012017>.
8. Arslankaya S, Atay H. Maintenance management and lean manufacturing practices in a firm which produces dairy products. *Procedia-Social and Behavioral Sciences* 2015; 207: 214-224, <https://doi.org/10.1016/j.sbspro.2015.10.090>.
9. Aucasime-Gonzales P, Tremolada-Cruz S, Chavez-Soriano P, Dominguez F, Raymundo C. Waste Elimination Model Based on Lean Manufacturing and Lean Maintenance to Increase Efficiency in the Manufacturing Industry. In *IOP Conference Series: Materials Science and Engineering IOP Publisher* 2020; 999(1): 012013, <https://doi.org/10.1088/1757-899X/999/1/012013>.
10. Ball P, Lunt P. Lean eco-efficient innovation in operations through the maintenance organisation. *International Journal of Production Economics* 2020; 219: 405-415, <https://doi.org/10.1016/j.ijpe.2018.07.007>.
11. Baluch NH, Che Sobry A, Shahimi M. TPM and Lean maintenance-A Critical Review Interdisciplinary. *Journal of Contemporary Research in Business* 20124 (2): 850-857.
12. Barnard A. Lean Reliability Engineering. In *INCOSE International Symposium* 2014; 24(s1): 13-23, <https://doi.org/10.1002/j.2334-5837.2014.00002.x>.
13. Bar-or A, Schuster A, Wolff R, Keren D. Decision tree induction in high dimensional hierarchically distributed databases. In *Proceedings SI-AM International Data Mining Conference Newport Beach CA* 2005; 466-470, <https://doi.org/10.1137/1.9781611972757.42>.
14. Bertolini M, Mezzogori D, Neroni M, Zammori F. Machine Learning for industrial applications: a comprehensive literature review. *Expert Systems with Applications* 2021; 114820, <https://doi.org/10.1016/j.eswa.2021.114820>.
15. Bhasin S. Prominent obstacles to lean. *International Journal of Productivity and Performance Management* 2011; 61(4): 403-425, <https://doi.org/10.1108/17410401211212661>.
16. Bhuvanesh Kumar M, Parameshwaran R. Fuzzy integrated QFD FMEA framework for the selection of lean tools in a manufacturing organisation. *Production Planning & Control* 2018; 29(5): 403-417, <https://doi.org/10.1080/09537287.2018.1434253>.
17. Bortolotti T, Boscarri S, Danese P. Successful lean implementation: Organizational culture and soft lean practices. *International Journal of Production Economics* 2015; 160: 182-201, <https://doi.org/10.1016/j.ijpe.2014.10.013>.
18. Breiman L, Friedman JH, Olshen RA, Stone CJ. *Classification and Regression Trees*. Chapman & Hall New York 1984.
19. Bukowski L, Werbińska-Wojciechowska S. Using fuzzy logic to support maintenance decisions according to Resilience-Based Maintenance concept. *Eksploatacja i Niezawodność - Maintenance and Reliability* 2021; 23 (2): 294-307, <https://doi.org/10.17531/ein.2021.2.9>.
20. Campagner A, Ciucci D, Hüllermeier E. Rough set-based feature selection for weakly labeled data. *International Journal of Approximate Reasoning* 2021; 136: 150-167, <https://doi.org/10.1016/j.ijar.2021.06.005>.
21. Ceruti A, Marzocca P, Liverani A, Bil C. Maintenance in aeronautics in an industry 4.0 context: the role of augmented reality and additive manufacturing. *Journal of Computational Design and Engineering* 2019; 6(4): 516-526, <https://doi.org/10.1016/j.jcde.2019.02.001>.
22. Chemweno P, Pintelon L, Muchiri PN, Van Horenbeek A. Risk assessment methodologies in maintenance decision making: A review of dependability modelling approaches. *Reliability Engineering & System Safety* 2018; 173: 64-77, <https://doi.org/10.1016/j.res.2018.01.011>.
23. Chen C, Wang C, Lu N, Jiang B, Xing Y. A data-driven predictive maintenance strategy based on accurate failure prognostics. *Eksploatacja i Niezawodność - Maintenance and Reliability* 2021; 23 (2): 387-394, <https://doi.org/10.17531/ein.2021.2.19>.
24. Chowdry BV, Ojha K, Alexander A. Improvement of refinery maintenance and mechanical services: application of lean manufacturing principles. *International Journal of Collaborative Enterprise* 2018; 6(1): 20-36, <https://doi.org/10.1504/IJCENT.2018.092082>.
25. Ciano MP, Pozzi R, Rossi T, Strozzi F. How IJPR has Addressed 'Lean': A Literature Review Using Bibliometric Tools. *International Journal of Production Research* 2019; 57 (15-16): 5284-5317, <https://doi.org/10.1080/00207543.2019.1566667>.
26. Damián M, Chambilla M, Viacava G, Eyzaguirre J, Raymundo C. Lean Service Model for Maintenance Management Using a Linear Programming Approach. In *2021 10th International Conference on Industrial Technology and Management (ICITM) 2021*; 25-30, <https://doi.org/10.1109/ICITM52822.2021.00012>.

27. Dekker R. Applications of maintenance optimisation models: A review and analysis. *Reliability Engineering and System Safety* 1996; 51: 229-240, [https://doi.org/10.1016/0951-8320\(95\)00076-3](https://doi.org/10.1016/0951-8320(95)00076-3).
28. Drożnyer P. The impact of the implementation of management system on the perception of role and tasks of maintenance services and effectiveness of their functioning. *Journal of Quality in Maintenance Engineering* 2021; 27(2): 430-450, <https://doi.org/10.1108/JQME-09-2019-0089>.
29. Duran O, Capaldo A, Acevedo PAD. Lean maintenance applied to improve maintenance efficiency in thermoelectric power plants. *Energies* 2017; 10(10): 1-22, <https://doi.org/10.3390/en10101653>.
30. Epler I, Sokolović V, Milenković M, Bukvić M. Application of lean tools for improved effectiveness in maintenance of technical systems for special purposes. *Eksploracija i Niezawodność - Maintenance and Reliability* 2017; 19 (4): 615–623, <https://doi.org/10.17531/ein.2017.4.16>.
31. Fawcett T. An introduction to ROC analysis. *Pattern Recogn Lett* 2006; 27: 861-874, <https://doi.org/10.1016/j.patrec.2005.10.010>.
32. Gao R, Wang L, Teti R, Dornfeld D, Kumara S, Mori M, Helu M. Cloud-enabled Prognosis for Manufacturing. *CIRP Annals-Manufacturing Technology* 2015; 64(2): 749-772, <https://doi.org/10.1016/j.cirp.2015.05.011>.
33. Gaur J, Goel AK, Rose A, Bhushan B. Emerging trends in machine learning. In 2019 2nd International Conference on Intelligent Computing Instrumentation and Control Technologies (ICICT) IEEE 2019; 1: 881-885, <https://doi.org/10.1109/ICICT46008.2019.8993192>.
34. Godara S, Singh R. Evaluation of predictive machine learning techniques as expert systems in medical diagnosis. *Indian Journal of Science and Technology* 2016; 9(10): 1-14, <https://doi.org/10.17485/ijst/2016/v9i10/87212>.
35. Gupta S, Gupta P, Parida A. Modeling lean maintenance metric using incidence matrix approach. *International Journal of System Assurance Engineering and Management* 2017; 8(4): 799-816, <https://doi.org/10.1007/s13198-017-0671-z>.
36. Henríquez-Alvarado F, Luque-Ojeda V, Macassi-Jauregui I, Alvarez JM, Raymundo-Ibañez C. Process optimization using lean manufacturing to reduce downtime: Case study of a manufacturing SME in Peru. Paper presented at the ACM International Conference Proceeding Series 2019; 261-265.
37. Holgado M, Macchi M, Evans S. Exploring the impacts and contributions of maintenance function for sustainable manufacturing. *International Journal of Production Research* 2020; 58(23): 7292-7310, <https://doi.org/10.1080/00207543.2020.1808257>.
38. Jasiulewicz-Kaczmarek M, Antosz K, Wyczólkowski R, Mazurkiewicz D, Sun B, Qian C, Ren Y. Application of MICMAC, Fuzzy AHP, and Fuzzy TOPSIS for Evaluation of the Maintenance Factors Affecting Sustainable Manufacturing. *Energies* 2021; 14(5): 1436, <https://doi.org/10.3390/en14051436>.
39. Jasiulewicz-Kaczmarek M, Antosz K, Zywicka P, Mazurkiewicz D, Sun B, Ren Y. Framework of machine criticality assessment with criteria interactions. *Eksploracja i Niezawodność - Maintenance and Reliability* 2021; 23(2): 207-220, <https://doi.org/10.17531/ein.2021.2.1>.
40. Jasiulewicz-Kaczmarek M, Saniuk A. How to Make Maintenance Processes More Efficient Using Lean Tools?. In *International Conference on Applied Human Factors and Ergonomics*, Cham 2018; 9-20, https://doi.org/10.1007/978-3-319-60828-0_2.
41. Jasiulewicz-Kaczmarek M, Żywica P, Gola A. Fuzzy set theory driven maintenance sustainability performance assessment model: A multiple criteria approach. *Journal of Intelligent Manufacturing* 2021; 32(5): 1497-1515, <https://doi.org/10.1007/s10845-020-01734-3>.
42. Jing S, Niu Z, Chang PC. The application of VIKOR for the tool selection in lean management. *Journal of Intelligent Manufacturing* 2019; 30(8): 2901-2912, <https://doi.org/10.1007/s10845-015-1152-3>.
43. Kammerer K, Hoppenstedt B, Pryss R, Stokler S, Allgaier J, Reichert M. Anomaly detections for manufacturing systems based on sensor data-insights into two challenging real-world production settings. *Sensors* 2019; 19(24): 5370, <https://doi.org/10.3390/s19245370>.
44. Khazravi N, Alavi SM. A New Method To Feature Selection In Rough Fuzzy Set Theory Based On Degree Of Separation Turkish. *Journal of Computer and Mathematics Education (TURCOMAT)* 2021; 12(14): 1889-1897.
45. Kovács G. Combination of Lean Value-Oriented Conception and Facility Layout Design for Even More Significant Efficiency Improvement and Cost Reduction. *International Journal of Production Research* 2020; 58 (10): 2916-2936, <https://doi.org/10.1080/00207543.2020.1712490>.
46. Kuhnle A, Jakubik J, Lanza G. Reinforcement learning for opportunistic maintenance optimization. *Production Engineering* 2018; 13(1): 33-41, <https://doi.org/10.1007/s11740-018-0855-7>.
47. Kumar MB, Parameshwaran R. A comprehensive model to prioritise lean tools for manufacturing industries: a fuzzy FMEA AHP and QFD-based approach. *International Journal of Services and Operations Management* 2020; 37(2): 170-196, <https://doi.org/10.1504/IJSOM.2020.110337>.
48. Larose DT. *Discovering knowledge from data Introduction to data mining*. Scientific publisher PWN Warsaw 2013, <https://doi.org/10.1002/9781118874059>.
49. Lundgren C, Skoogh A, Bokrantz J. Quantifying the effects of maintenance-a literature review of maintenance models. *Procedia CIRP* 2018; 72: 1305-1310, <https://doi.org/10.1016/j.procir.2018.03.175>.
50. Ma J, Atef M, Nada S, Nawar A. Certain Types of Covering-Based Multigranulation -Fuzzy Rough Sets with Application to Decision-Making Complexity 2020; Article ID 6661782, <https://doi.org/10.1155/2020/6661782>.
51. Macchi M, Roda I, Fumagalli L. On the Advancement of Maintenance Management Towards Smart Maintenance in Manufacturing. *IFIP International Conference on Advances in Production Management Systems (APMS) Hamburg Germany Springer, Cham*. 2017; 383-390, https://doi.org/10.1007/978-3-319-66923-6_45.
52. Marksberry P. *The Modern Theory of the Toyota production System: A Systems Inquiry of the world's most emulated and profitable management system*. CSR Press, Taylor & Francis Group, New York 2013.
53. Marttonen-Arola S, Baglee D, Kinnunen SK, Holgado M. Introducing Lean into Maintenance Data Management: A Decision Making Approach. In: Liyanage J Amadi-Echendu J Mathew J (eds) *Engineering Assets and Public Infrastructures in the Age of Digitalization Lecture Notes in Mechanical Engineering Springer Cham* 2020; https://doi.org/10.1007/978-3-030-48021-9_28.
54. Matyas K, Nemeth T, Kovacs K, Glawar R. A procedural approach for realizing prescriptive maintenance planning in manufacturing industries. *CIRP Annals* 2017; 66(1): 461-464, <https://doi.org/10.1016/j.cirp.2017.04.007>.
55. McCarthy D, Rich N. *Lean TPM A Blueprint for Change*. Elsevier Butterworth-Heinemann 2004, <https://doi.org/10.1016/B978-075065857-7/50005-6>.
56. Mosyurchak A, Veselkov V, Turygin A, Hammer M. Prognosis of behaviour of machine tool spindles their diagnostics and maintenance. *MM Science Journal* 2017; 2100-2104, https://doi.org/10.17973/MMSJ.2017_12_201794.
57. Mouzani IA, Bouami DRIS. The integration of lean manufacturing and lean maintenance to improve production efficiency. *International*

- Journal of Mechanical and Production Engineering Research and Development 2019; 9(1): 601-612, <https://doi.org/10.24247/ijmperdfeb201957>.
58. Muchiri P, Pintelon L, Gelders L, Martin H. Development of maintenance function performance measurement framework and indicators. *International Journal of Production Economics* 2011; 131(1): 295-302, <https://doi.org/10.1016/j.ijpe.2010.04.039>.
 59. Mumani AA, Magableh GM, Mistarihi MZ. Decision making process in lean assessment and implementation: a review. *Management Review Quarterly* 2021; 1-40, <https://doi.org/10.1007/s11301-021-00222-z>.
 60. Ndhafie N, Nidhal R , Hajji A, Bistorin O. Environmental issue in an integrated production and maintenance control of unreliable manufacturing/remanufacturing systems. *International Journal of Production Research* 2020; 58(14): 4182-4200, <https://doi.org/10.1080/00207543.2019.1650212>.
 61. Nowotarski P, Paślowski J, Dallasega P. Multi-Criteria Assessment of Lean Management Tools Selection in Construction. *Archives of Civil Engineering* 2021; 711-726.
 62. Pasko Ł, Setlak G. Badanie jakości predykcyjnej segmentacji rynku. *Zeszyty Naukowe Politech Śląskiej Seria Informatyka* 2016; 37: 83-97.
 63. Pawlak Z, Polkowski L, Skowron A. Rough set theory. *KI* 2001; 15(3): 38-39, https://doi.org/10.1007/978-3-7908-1776-8_1.
 64. Pawlak Z. *Rough Sets: Theoretical Aspects of Reasoning about Data Theory and Decision*. Library D: Springer Netherlands 1991, https://doi.org/10.1007/978-94-011-3534-4_7.
 65. Peres RS, Barata J, Leitao P, Garcia G. Multistage quality control using machine learning in the automotive industry. *IEEE Access* 2019; 7: 79908-79916, <https://doi.org/10.1109/ACCESS.2019.2923405>.
 66. Phogat S, Gupta AK. Theoretical analysis of JIT elements for implementation in the maintenance sector of Indian industries. *International Journal of Productivity and Quality Management* 2018; 25(2): 212-224, <https://doi.org/10.1504/IJPQM.2018.094765>.
 67. Pinto GFL, Silva FJG, Campilho RDSG, Casais R B, Fernandes A J, Baptista A. Continuous improvement in maintenance: a case study in the automotive industry involving Lean tools. *Procedia Manufacturing* 2019; 38: 1582-1591, <https://doi.org/10.1016/j.promfg.2020.01.127>.
 68. Pombal , Ferreira LP, Sá J C, Pereira MT, Silva FJG. Implementation of lean methodologies in the management of consumable materials in the maintenance workshops of an industrial company. *Procedia Manufacturing* 2019; 38: 975-982, <https://doi.org/10.1016/j.promfg.2020.01.181>.
 69. Qu J, Bai X, Gu J , Taghizadeh-Hesary F, Lin J. Assessment of Rough Set Theory in Relation to Risks Regarding Hydraulic Engineering Investment Decisions. *Mathematics* 2020; 8(8): 1308, <https://doi.org/10.3390/math8081308>.
 70. Ramos E, Mesia R, Alva C, Miyashiro R. Applying lean maintenance to optimize manufacturing processes in the supply chain: A Peruvian print company case. *International Journal of Supply Chain Management* 2020; 9: 264-281.
 71. Ravikumar S, Ramachandran KI, Sugumaran V. Machine learning approach for automated visual inspection of machine components. *Expert systems with applications* 2011; 38(4): 3260-3266, <https://doi.org/10.1016/j.eswa.2010.09.012>.
 72. Rødseth H, Schjølberg P. Data-driven predictive maintenance for green manufacturing In *Proceedings of the 6th international workshop of advanced manufacturing and automation. Advances in Economics Business and Management Research Atlantis Press* 2016; 36-41.
 73. Sakthi Nagaraj T, Jeyapaul R, Vimal KEK, Mathiyazhagan K. Integration of human factors and ergonomics into lean implementation: ergonomic-value stream map approach in the textile industry. *Production Planning & Control* 2019; 30(15): 1265-1282, <https://doi.org/10.1080/09537287.2019.1612109>.
 74. Saxena A, Saad A. Evolving an artificial neural network classifier for condition monitoring of rotating mechanical systems. *Applied Soft Computing* 2007; 7(1): 441-454, , <https://doi.org/10.1016/j.asoc.2005.10.001>.
 75. Shanmuganathan VK, Haran AP, Gayathri N. Condition monitoring maintenance of aero-engines through LUMS-A method for the implementation of Lean tools. *Measurement* 2015; 73: 226-230, <https://doi.org/10.1016/j.measurement.2015.05.017>.
 76. Shou W, Wang J, Wu P, Wang X. Lean management framework for improving maintenance operation: development and application in the oil and gas industry. *Production Planning & Control* 2021; 32(7):585-602, <https://doi.org/10.1080/09537287.2020.1744762>.
 77. Shou W, Wang J, Wu P, Wang X. Value adding and non-value adding activities in turnaround maintenance process: classification validation and benefits. *Production Planning & Control* 2020; 31(1): 60-77, <https://doi.org/10.1080/09537287.2019.1629038>.
 78. Sidhu SS, Singh K, Ahuja IS. An empirical investigation of maintenance practices for enhancing manufacturing performance in small and medium enterprises of northern India. *Journal of Science and Technology Policy Management* 2021; <https://doi.org/10.1108/JSTPM-11-2019-0109>.
 79. Simões JM, Gomes CF, Yasin MM. Changing role of maintenance in business organisations: measurement versus strategic orientation. *International Journal of Production Research* 2016; 54(11): 3329-3346, <https://doi.org/10.1080/00207543.2015.1106611>.
 80. Singh AK, Vinodh S, Vimal KEK. Application of Grey based decision making approach for lean tool selection. In *5th International & 26th All India Manufacturing Technology Design and Research Conference (AIMTDR 2014) December 12th-14th 2014 IIT Guwahati Assam India* 2014.
 81. Skowron A, Dutta S. Rough sets: past present and future. *Natural computing* 2018; 17(4): 855-876, <https://doi.org/10.1007/s11047-018-9700-3>.
 82. Smith R , Hawkins B. *Lean maintenance; reduce cost improve quality and increase market share*. Elsevier Butterworth-Heinemann 2004.
 83. Sokolova M, Lapalme GA. Systematic analysis of performance measures for classification tasks. *Information Process Management* 2009; 45: 427-437, <https://doi.org/10.1016/j.ipm.2009.03.002>.
 84. Świdorski A, Borucka A, Grzelak M, Gil L. Evaluation of Machinery Readiness Using Semi-Markov Processes. *Applied Sciences* 2020; 10(4):1541, <https://doi.org/10.3390/app10041541>.
 85. Thawkar A, Tambe P, Deshpande V. A reliability centred maintenance approach for assessing the impact of maintenance for availability improvement of carding machine. *International Journal of Process Management and Benchmarking* 2018; 8(3): 318-339, <https://doi.org/10.1504/IJPMB.2018.092891>.
 86. Tortorella GL, Fogliatto FS, Cauchick-Miguel PA, Kurnia S, Jurburg D. Integration of Industry 4 0 technologies into Total Productive Maintenance practices. *International Journal of Production Economics* 2021; 240: 108224, <https://doi.org/10.1016/j.ijpe.2021.108224>.
 87. Traini E, Bruno G, D'antonio G, Lombardi F. Machine learning framework for predictive maintenance in milling. *IFAC-PapersOnLine* 2019; 52(13): 177-182, <https://doi.org/10.1016/j.ifacol.2019.11.172>.
 88. Van Horenbeek A, Kellens K, Pintelon L, Dufloy JR. Economic and environmental aware maintenance optimization. *Procedia CIRP* 2014,

- 15: 343-348, <https://doi.org/10.1016/j.procir.2014.06.048>.
89. Velmurugan RS, Dhingra T. Maintenance Strategy Selection and its Impact in Maintenance Function: a Conceptual Framework. *International Journal of Operations & Production Management* 2015; 35 (12): 1622-1661, <https://doi.org/10.1108/IJOPM-01-2014-0028>.
90. Welte R, Estler M, Lucke D. A Method for Implementation of Machine Learning Solutions for Predictive Maintenance in Small and Medium Sized Enterprises. *Procedia CIRP* 2020; 93: 909-914, <https://doi.org/10.1016/j.procir.2020.04.052>.
91. Wu Z, Xu J, Xu Z. A multiple attribute group decision making framework for the evaluation of lean practices at logistics distribution centres. *Annals of Operations Research* 2016; 247(2): 735-757, <https://doi.org/10.1007/s10479-015-1788-6>.
92. Ylipää T, Skoogh A, Bokrantz J, Gopalakrishnan M. Identification of maintenance improvement potential using OEE assessment. *International Journal of Productivity and Performance Management* 2017; 66(1): 126-143, <https://doi.org/10.1108/IJPPM-01-2016-0028>.
93. Zhang C, Wang C, Chen Q. Design of Lean Maintenance Process for Ball Screw Actuator. In 2019 IEEE 1st International Conference on Civil Aviation Safety and Information Technology (ICCASIT) IEEE 2019; 425-430, <https://doi.org/10.1109/ICCASIT48058.2019.8973230>.